EVS200A

H.264/ MPEG4/ MJPEG | PTZ Control | POE | Web Viewer | Smart Event Wizard | FTP/SMTP Client Support | Two-Way Audio | SD Card Slot

Features

- High quality H.264/MPEG-4 and MJPEG multi-stream output at 4CIF resolution at 60 FPS
- Dual stream (per channel) for simultaneous live monitoring and high resolution recording
- Smart Wizard setting for varies event and schedule recording
- Built-in SD memory card slot for local storage
- Supports SD high capacity
- Space saving with ultra compact design

Specifications

Channels	2
Recording/Playback Rate	up to 30 FPS per channel
Total Recording Rate	up to 60 FPS (2 channels up to 30 FPS each)
Antenna Gain	2 dBi (EVS200AW only)
Serial Connector	RS485 (EVS200AW)
Recording Resolution	4CIF, VGA, CIF, QVGA, QCIF
Compression Supported	H.264/MPEG-4/M-JPEG
Compression Method	IMA ADPCM (Pulse Code Modulation)
Audio	Two-way audio
Video Storage (Excludes O/S and system software on HDD 1)	SD card interface for local storage, supports SDHC
Network Interface	10Base-T/100Base-TX auto-negotiation, RJ-45 socket. Supports MDI/MDI-X auto crossover function.
Max Client Limit	32 simultaneous clients
Pre/Post Alarm Buffer	48MB RAM reserved for pre-alarm (record up to 120 sec)
Alarm I/O	2 in / 2 out (EVS200AW)
Event Trigger	Alarm Input, Manual Trigger, Motion Detection and Schedule Recording
Notification	Trigger alarm output, send email notification, upload video to FTP, record video to SD card, record video to PC and network alarm
PTZ	Supports PTZ control
Remote Video Access Method	Internet Explorer 8
Power	12VDC & PoE
Power Consumption	4.5W max (12VDC)
Temperature	0°C ~40°C / 32°F~104°F
Housing	Compact
Dimensions	4.6" x 3.15" x 1.57" (EVS200A), 6" x 3.15" x 4.02" (EVS200AW)
Weight	0.6 lbs (EVS200A), 0.8 lbs (EVS200AW)
Certifications	CE, FCC

Dimensions: mm/in

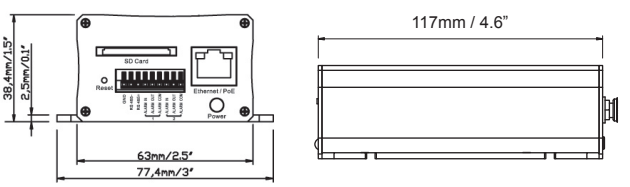

Ordering Info

EVS200A: 2 Ch., Video Server Encoder